



Suitable for the use of 220-240V and 50-60HZ.

Please wear gloves as installment and avoid rot on the surface of plating.

Must be installed on the fixed places and be checked annually.

Please turn off the lighting source by soft cloth as cleaning prohibited to use of rotted detergent.


Please connect with the local sales service center when there are any abnormality.

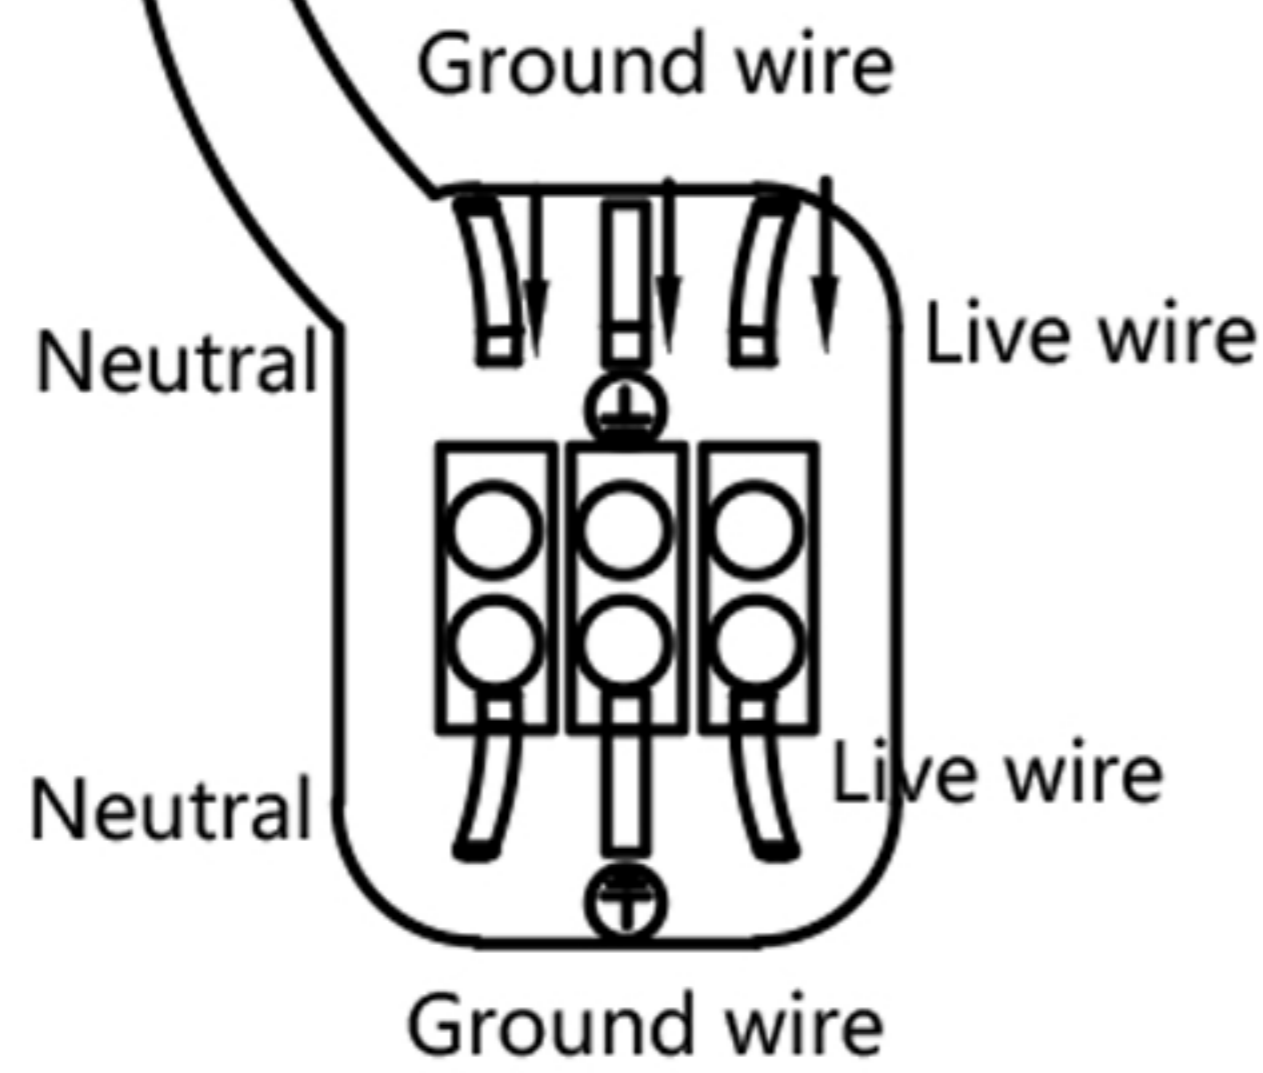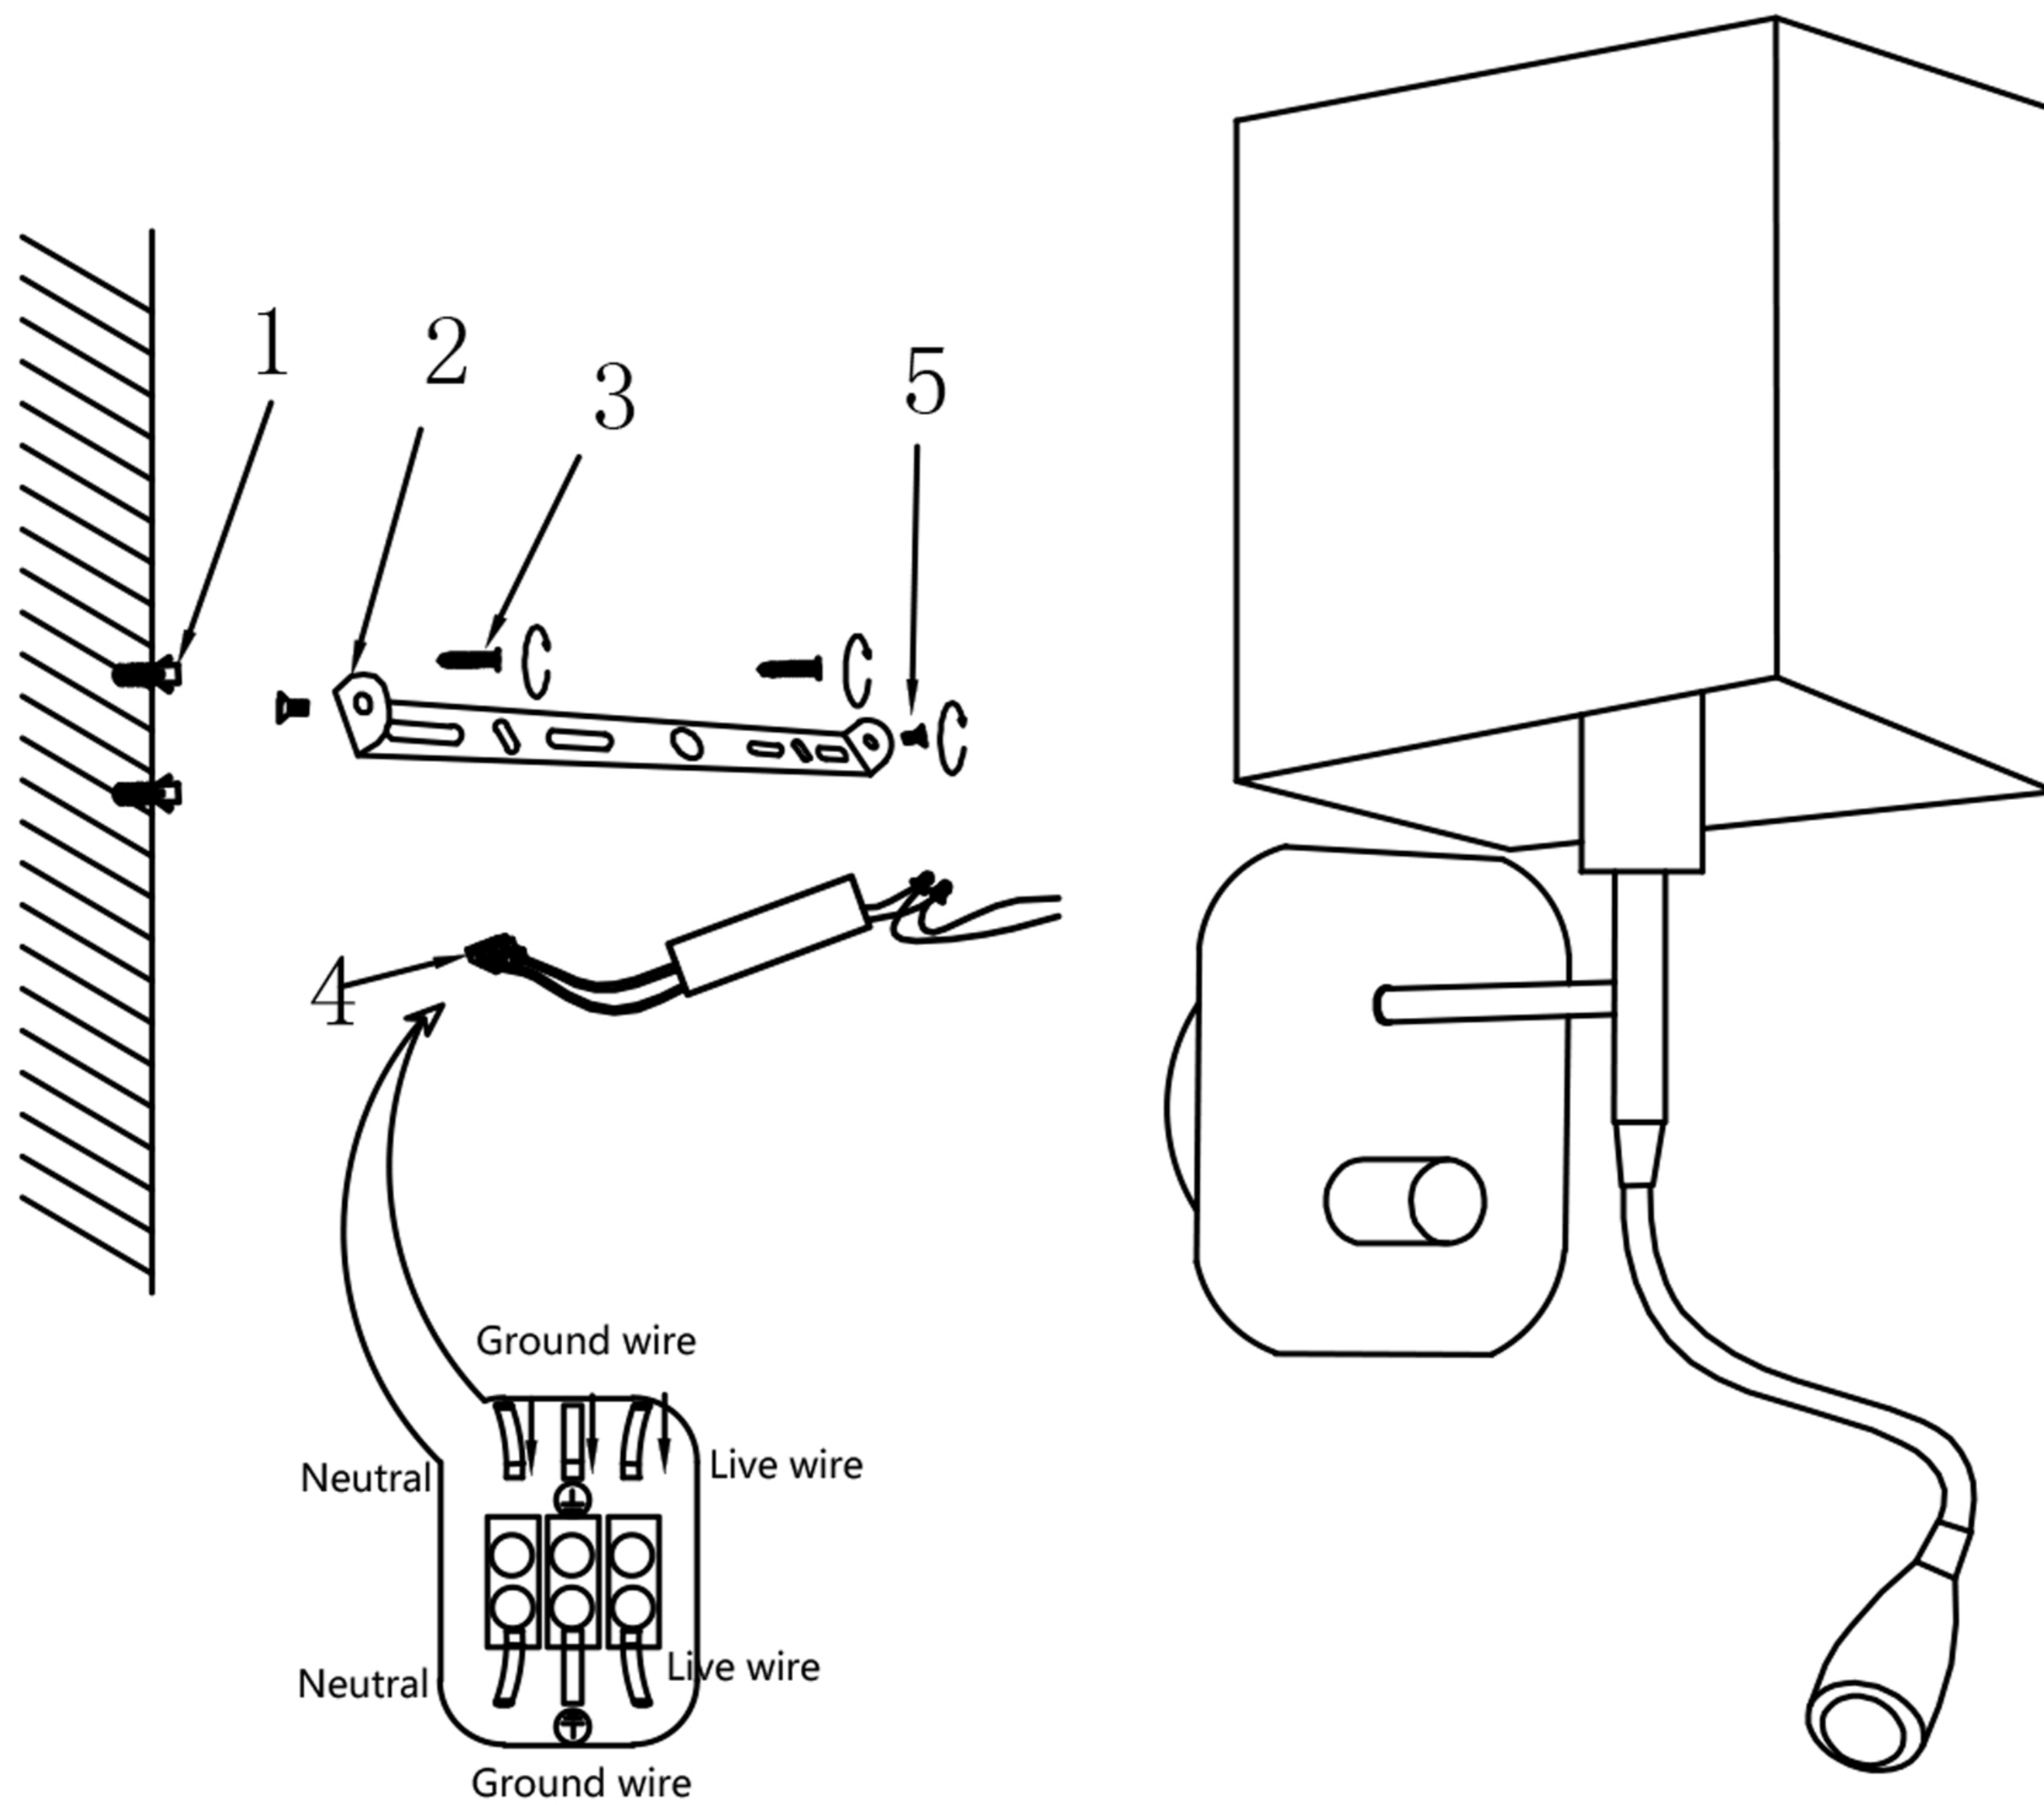

Live wire-Brown
Neutral-Light grey
Ground wire-Yellow

- 1 Wall anchor
- 2 Mounting
- 3 Self-tapping screw
- 4 Terminal
- 5 Nut
- 6 Black

Product coding: PACO AP2

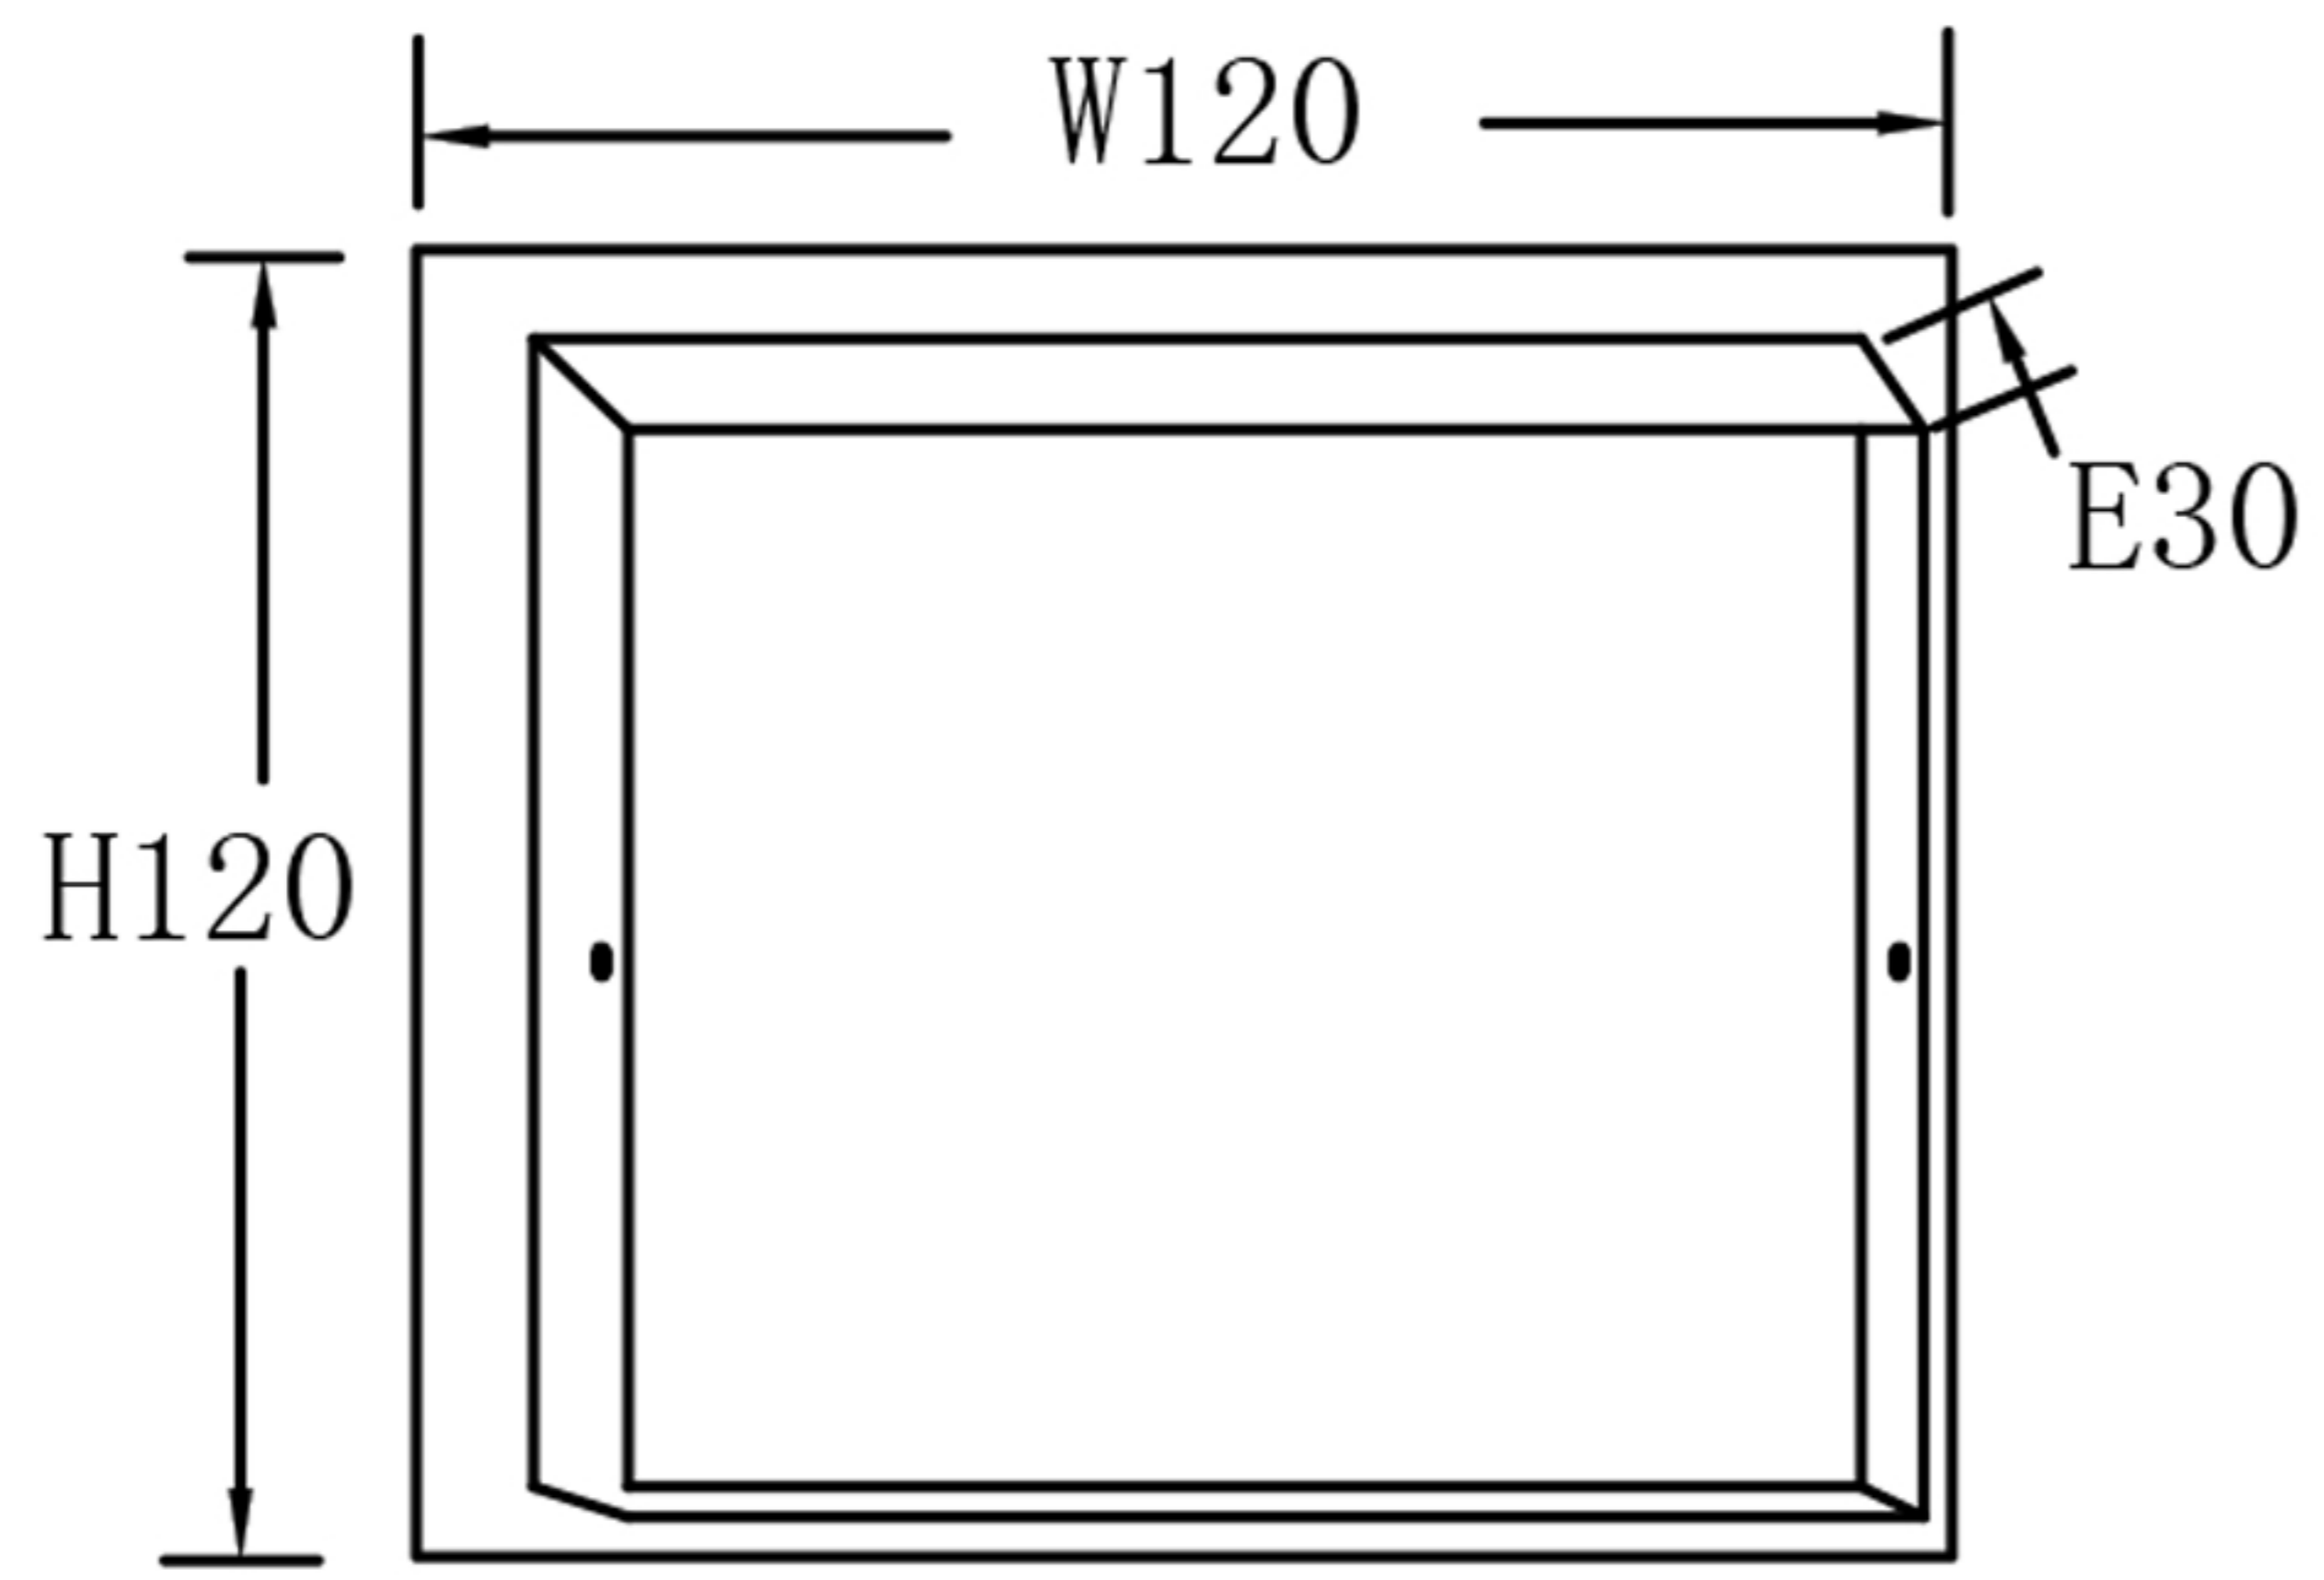

FITURE SIZE

