
LIGHTING INSTALLATION DRAWING

Assembly diagram

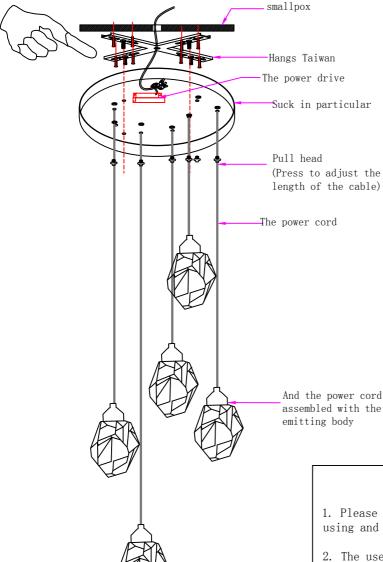

Installation steps

- 1. Lock the hanging plate on the ceiling
- 2. Lock the luminescent lamp body which has been locked with the power cord on the disk
- 3. Adjust the required length of the power cord
- 4. Connect the power cord and the power drive to the power supplyThe other end and smallpox main line connected
- 5. Lock the locked integral plate on the hanging board
- 6. open the switch pilot is on

And the power cord has been assembled with the light

\Matters needing attention

- 1. Please read the assembly drawing carefully before installing, using and servicing the lamps. Please keep it for future use.
- 2. The use of power supply should not exceed the specified range (rated voltage AC85-265V Frequency 50Hz) Long time use above the rated voltage range may cause overheating and damage to the
- 3. Please pay attention to check whether the cable and switch are in good condition before use, and ensure that the local voltage is consistent with the lamp voltage.
- 4. Please turn off the power before installing the lamp.
- 5. Do not install the lamps on high temperature objects, such as furnace, gas, etc.

Light fixtures may be damaged above the exhaust pipe, etc.

- 6. Do not refit the lamps without permission to avoid failure.
- 7. When the lamp is not on after the power is switched on, please check whether the energy-saving lamp is in good condition and whether the contact is bad.
- 8. Please clean and check regularly. Before cleaning, please turn off the power and wipe its surface with a soft dry cloth, but do not wipe with acid or alkaline chemical solvent, otherwise it will cause serious damage to its surface.