




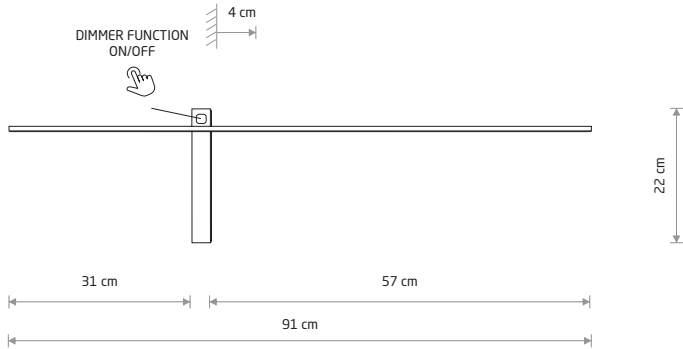


IMPULSE LED M
painted aluminum, plastic PC
8116

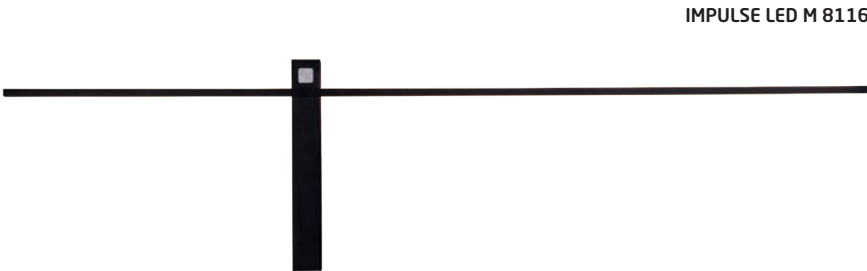

IMPULSE LED L
painted aluminum, plastic PC
8117

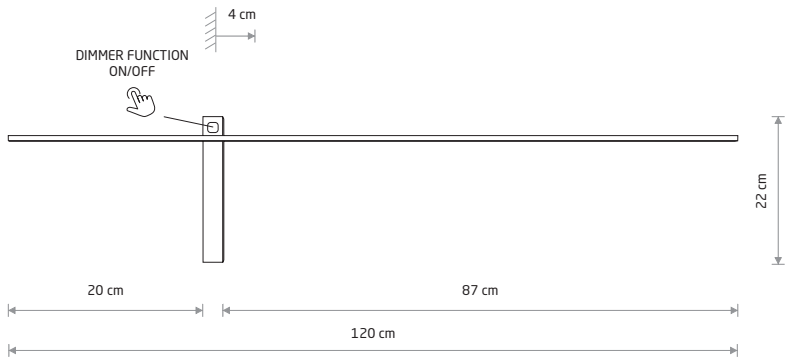

IMPULSE LED S 8115

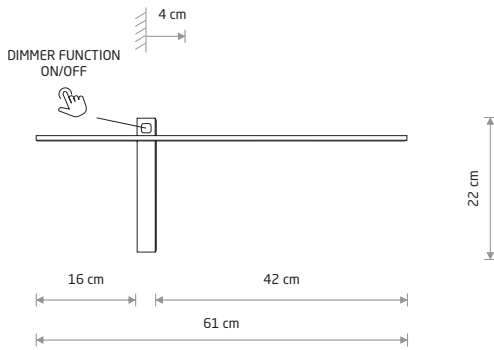

IMPULSE LED S
painted aluminum, plastic PC
8115

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8115	6W LED	3000K	200 lm	120 °	≥80	~220-230 V, 50/60 Hz	☐	>0.5	IP23	30000h
8116	10W LED	3000K	350 lm	120 °	≥80	~220-230 V, 50/60 Hz	☐	>0.5	IP23	30000h
8117	15W LED	3000K	500 lm	120 °	≥80	~220-230 V, 50/60 Hz	☐	>0.5	IP23	30000h