




VISTA 8051




VISTA 8050

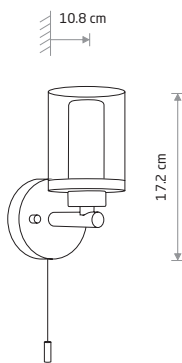

VISTA
chrome plated steel, glass

-  8051
-  1xG9, max 10W only LED
- IP44

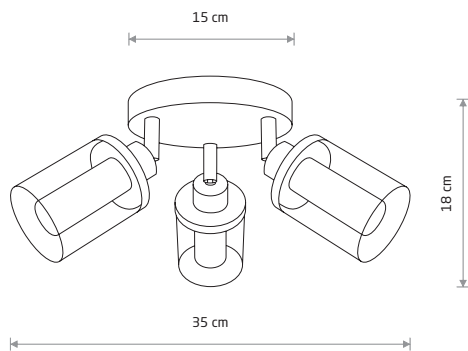


VISTA
chrome plated steel, glass

-  8050
-  3xG9, max 10W only LED
- IP44



MALAKKA LED 9501

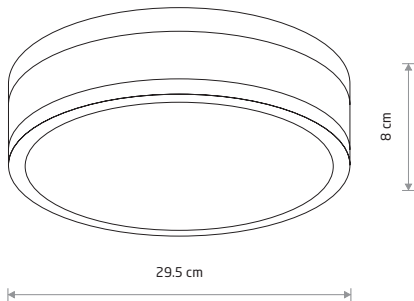


MALAKKA LED
chrome plated steel, glass

-  9501
- 




PAN LED S 8173

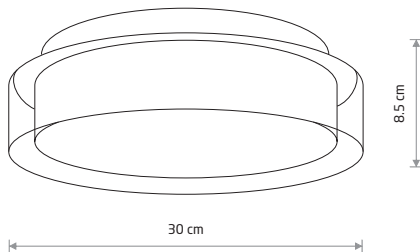

PAN LED S
glass, chrome plated steel

-  8173
- 

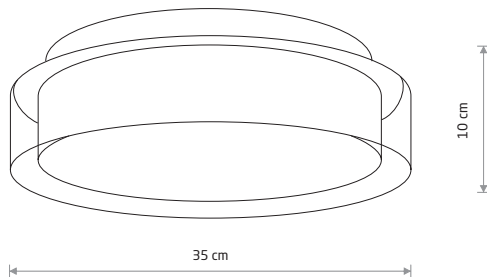

PAN LED M
glass, chrome plated steel

-  8174
- 

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9501	18W LED	4000K	940 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h
8173	12W LED	4000K	770 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h
8174	17W LED	4000K	1000 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h